




EcoWorx® Performance Broadloom

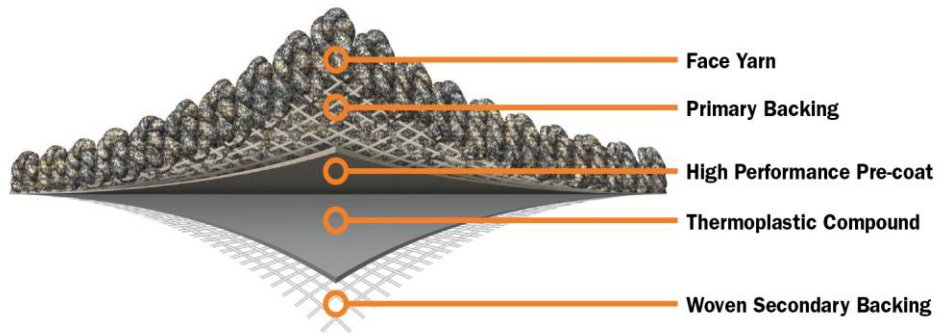

Specifications:

Backing Components: 100% thermoplastic polyolefin compound with a high performance precoat and a reinforcing layer

Backing process: 3-step process

1. High performance precoat for maximum tuft bind
2. Thermoplastic laminate for superior delamination
3. Woven synthetic outer layer for stability

Primary: Synthetic

Stabilizer: Reinforcing Layer

Weight: 39 oz/yd² (average)

Width: 12 feet

Testing:

Flammability: (Flooring Radiant Panel ASTM-E-648I) Class I (based on pile construction)

Smoke: (NBS Smoke Chamber ASTM-E-662) < 450 (based on pile construction)

Indoor Environmental Quality: (Total Volatile Organic Compounds) < 500 micrograms / sqm / hr

Installation:

Full spread direct glue-down; using Shaw 3500 adhesive or Shaw 3600 adhesive (with Florsept Antimicrobial). Seam Sealer required, Shaw 8300 (providing moisture impervious seam) or Shaw 4000

Performance:

Superior performance to traditional broadloom backing, no delamination, no edge ravel, complete moisture barrier – passes 10,000 impact test

Environmental:

Cradle to Cradle technology (Silver certified), Environmental Guarantee, PVC free, lighter in weight than traditional performance broadloom backings, low VOC's meeting CRI Green Label and Green Label plus requirements

Warranty:

Lifetime Commercial Warranty