




# Ultraloc® MPC

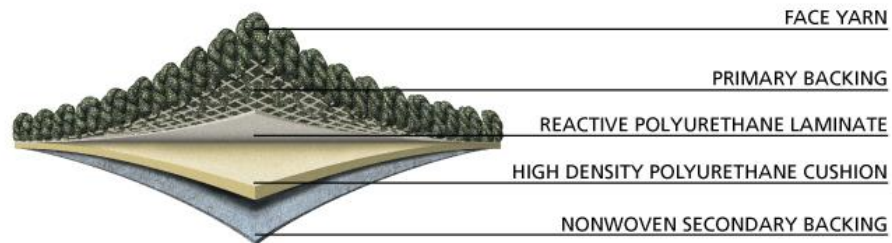

## Specification:

**Backing Components:** High performance polyurethane laminated to an 18 lb density polyurethane foam pad with a nonwoven secondary backing

**Backing Weight:** 60-66 oz / yd<sup>2</sup> (based on construction)

**Average Thickness:** .125 in

**Product Width:** 12 ft broadloom

## Testing:

**Flammability:** (Flooring Radiant Panel ASTM-E-648) Class I (direct glue-down installation only; compliant with face construction)

**Smoke:** (NBS Smoke Chamber ASTM-E-662) < 450 Specific Optical Density Indoor Environmental Quality: (Total Volatile Organic Compounds) < 500 micrograms / m<sup>2</sup> / hr (meets CRI Green Label requirements); Contains no 4PCH (4-phenylcyclohexine) or plasticizers

**Electrostatic Propagation:** (AATCC-134) < 3.5 KV at 70° F at 20% RH

**Moisture Resistance:** (British Spill Test) Passes

## Installation:

Full spread direct glue-down; utilizing a wide range of adhesives and seam sealers with CRI 104—standard for commercial carpet installation requirements.

## Warranty:

Lifetime Commercial Warranty against: Wear, Edge-Ravel, Zippering, Backing Delamination, Tuft Bind Failure, Moisture Management and Cushion Resilience.