

LOOKBOOK
















Natural State resilient is an SPC (Solid Polymer Composite) construction with dimensional stability, no telegraphing and resistance against indentation. Offered in a variety of thicknesses and installations, Natural State also features acoustical benefits making it a solution suitable for a variety of commercial environments.

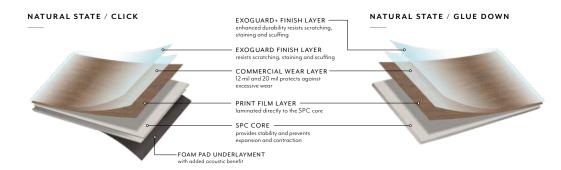



Natural State Click provides added acoustic benefits from foot traffic and floor-to-floor sound transfer.




Natural State Click features a solid locking system, providing protection from top-down moisture.



Both **Natural State Click and Glue Down** hides most subfloor imperfections.

COLORWAYS | 1531V / 1532V / 1533V

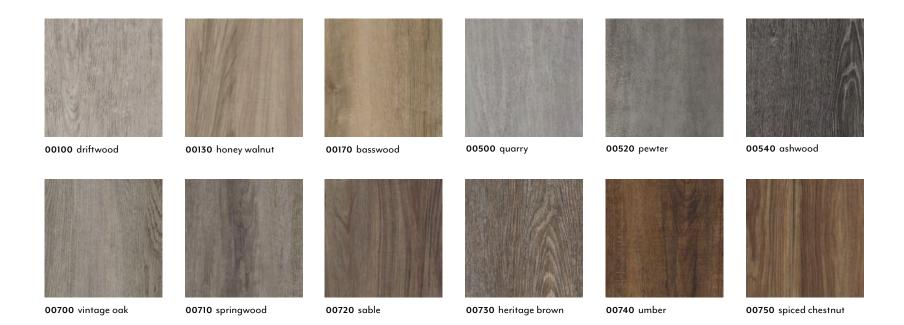



PRODUCT SPECIFICATIONS

NATURAL STATE | resilient plank

12 MIL | CLICK

style / I531V

6.92" x 48.03" | 17.6 cm x 122 cm product size

SPC with micro-bevel and attached foam cushion construction

.173" | 4.4mm total thickness .012" | 12mil (0.3mm) wear layer finish ExoGuard™

installation floating or glue down

20 MIL | CLICK

style / I532V

6.92" x 48.03" | 17.6 cm x 122 cm product size

SPC with micro-bevel and attached foam cushion construction

.173" | 4.4mm total thickness .020" | 20mil (0.5mm)

wear layer ExoGuard™

finish

floating or glue down installation

20 MIL | GLUE DOWN

style / I533V

product size $8.42" \times 58.97" \mid 21.4 \text{ cm} \times 149.8 \text{ cm}$

SPC with micro-bevel construction .118" | 3mm total thickness


.020" | 20mil (0.5mm) wear layer

ExoGuard+™ finish installation glue down

INSTALLATION METHODS

STAGGER* HERRINGBONE





NATURAL STATE in quarry, ashwood, vintage oak and springwood

^{*}Click products are only available in stagger installation