

Brookwood+

R
RESILIENT

BROOKWOOD+
style I319V

FLAX
color 09574

patcraft®

Patcraft's heterogeneous resilient sheet flooring is engineered for high demand environments. Manufactured using high performance raw materials, Brookwood+ is created to offer unparalleled strength and durability for end use installations. Durability, wear retention, longevity and many other performance requirements drive Patcraft product design so you know when you specify Patcraft, you specify performance.

because flooring matters.

Features and Benefits

- High performance resilient designed for high demand environments.
- Only commercial resilient sheet product available with embossed in register texture.
- Active antimicrobial, FlorSept®, defends against bacteria and fungi.
- 10 year limited commercial wear warranty.
- High performance matte finish is polish and buff optional for hassle free maintenance.
- Unmatched 10 year under bed warranty when installed with advanced adhesive Shaw 4100 or S150.
- FloorScore certified for low VOCs.
- Recommended Applications: high performance, high traffic end use applications including Healthcare, Education, Retail, Corporate and Housing.

Product Specifications

Style Name	BROOKWOOD+
Style Number	I319V
Construction	Heterogeneous Sheet
Wear Layer Thickness	20 mil or .020" (0.5 mm)
Overall Thickness	.086" (2.2 mm)
Reference Specification	ASTM 1303/Type I, Grade I
Backing Class	4-ply fused backing system
Finish	ExoGuard™ Quartz Enhanced Urethane
Installation	Glue Down
Recommended Adhesive	Shaw 4100 or S150
Antimicrobial	FlorSept®

Packaging

Roll Size	72" wide x 25 yd long rolls (50 sy/Roll)
Actual Weight	1.83 m wide x 22.86 m long rolls 5.64 lbs/yd ² (2.56 kg/m ²) 282.2 lbs/roll (128 kg/roll)

Warranty

10 year limited commercial wear warranty, 10 year under bed warranty when installed with Shaw 4100 or S150 adhesive. Please visit patcraft.com for the most current warranty information

Performance Testing

Commercial Traffic Class	Heavy
Slip Resistance / ASTM D 2047	ADA compliant
Static Load	1500 psi (lbs/sq in)
Residual Indentation / ASTM F 970	Passes <8%
Flexibility / ASTM F 137	Passes
Resistance to Heat / ASTM F 1514	Passes
Resistance to Light / ASTM F 1515	Passes
Resistance to Chemicals / ASTM F 925	Passes
Resistance to Fungi / ASTM G21	Passes, Rate "0" (Rate 0: Fungi Free)
Antibacterial Activity / AATCC 147	Passes, resists the propagation of bacteria
Radiant Flux / ASTM E 648	>0.45 watts/cm ² , NFPA Class I
Smoke Density / ASTM E 662	<450, Passes


Environmental

Indoor Air Quality	FloorScore® certified
LEED Scoreboard	IEQ4.1, IEQ4.3

Maintenance

Patcraft resilient products do not always require a floor finish. However, in certain applications a floor finish may be desirable to aid in stain resistance, resistance to abrasion or increased gloss level.

Construction

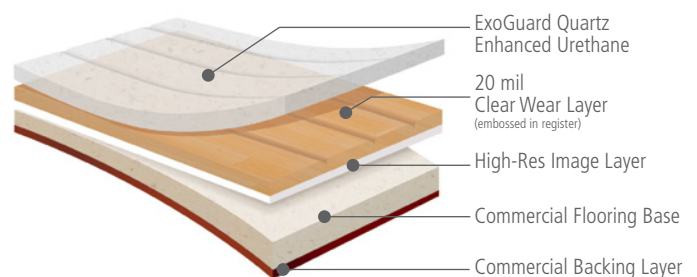

Installation


(see patcraft.com for complete installation instructions)

- Flooring material and adhesive must be acclimated to the installation area for a minimum of 48 hours prior to installation.
- Ensure that moisture tests have been conducted and that results do not exceed 8.0 lbs per 1000 sf in 24 hours as per ASTM F-1869, (or 87% when using Shaw 4100 or 90% when using Shaw S150) In-Situ relative humidity when tested according to ASTM F-2170.
- pH of concrete sub-floor must not exceed 10.
- Patcraft sheet products are dimensionally stable and will not shrink or compress. If cut too full, product may bubble.
- Install all cuts and rolls in consecutive sequence.
- Do not reverse sheets for seaming.
- Use Shaw S150 spray adhesive or Shaw 4100 and a 1/32" x 1/16" x 1/32" U-notch trowel to permanently install resilient flooring.
- Material should always be visually inspected prior to installation. Any material installed with visual defects will not be considered a legitimate claim as it pertains to labor costs.

Swatches




SUGAR CANE
01292




PECAN
05257




SPICEWOOD
05301




AMBER
05303




CINNAMON
05306



TOFFEE
07720



CARAMEL
08311



NUTMEG
09446



EARL GREY
42483




LEMON GRASS
42482



CHIA
42484



SESAME
42481



THYME
09633




FLAX
09574




SEA SALT
07717




BLACK TEA
08266




CIDER
09634



CLOVE
09572



VANILLA BEAN
09573



PEPPERCORN
09635

